

# Hydrotech® GardNet®

formerly known as GardNet®



BUILDING TRUST



## GENERAL DESCRIPTION


GardNet is an expandable polyethylene sheet strip assembly, connected by a series of offset, full-depth, ultrasonic welded seams aligned perpendicular to longitudinal axis of strips which, when expanded, form walls of a flexible, 3-dimensional, cellular soil confinement system. Each section of GardNet is 8 cells wide by a multiple of cells long. The assembly also consists of stainless steel cables, stainless steel and plastic washers, and copper stops.

## BASIC USE

GardNet is typically used for confinement of LiteTop® Growing Media on sloped Garden Roof® Assembly applications.

## INSTALLATION

- GardNet is used on slopes equal to/greater than 3:12 (14 degrees). In certain instances, slopes less than 3:12 may require GardNet; contact Hydrotech for assistance
- Slopes greater than 12:12 (45 degrees) are possible with special design considerations.
- GardNet is only supplied on projects in which Hydrotech's MM6125® assembly is also supplied for the entire project including non GardNet areas.
- GardNet projects require specific input by Hydrotech to determine GardNet depth, cable sizing and spacing.
- Architect or other appropriate project design professional is responsible for designing the building connection to which GardNet is attached. Hydrotech will provide cable spacing and loadings for use by the design team professional to develop the building connection.
- All components in a GardNet assembly must be provided by Hydrotech including LiteTop engineered Growing Media, cables, stops, Dow STYROFOAM™ and related drainage elements. Substitutions are not allowed.

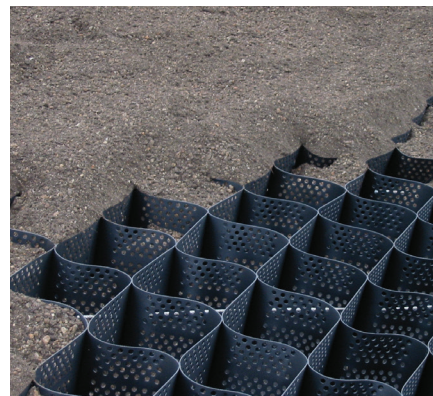

## TECHNICAL DATA

PROPERTY	TEST METHOD	RESULTS
COLOR		Black
CELL WALL THICKNESS in. (mm)	ASTM D5199	0.05 (1.27) (-5, +10%)
SHEET STRIP HEIGHT in. (mm)		3, 4, 6, 8, 12 (75,100,150, 203, 305)
SECTION COVERAGE sq.ft. (sq.m.) nominal each section is 8 cells wide (approx. 8.7 ft. - expanded)		18 cell section - 136 (12.6) 21 cell section - 159 (14.8) 25 cell section - 189 (17.6) 29 cell section - 219 (20.3) 34 cell section - 257 (23.9)
POLYETHYLENE DENSITY lb./cu.ft. (g/cm3)	ASTM D1505	58.4-60.2 (0.935-0.965)
POLYETHYLENE ENVIRONMENTAL STRESS CRACK RESISTANCE (ESCR)	ASTM D1693	3,000 hours
SEAM PEEL STRENGTH lb.-force (N)		240 (1060) – 3 in. strip 320 (1420) – 4 in. strip 480 (2130) – 6 in. strip 640 (2840) – 8 in. strip 960 (4260) – 12 in. strip
SEAM HANG STRENGTH lb. (kg) 7 days/1 hr. temp. cycling – ambient to 160°F	ASTM E41	160 (72.5)
CARBON BLACK CONTENT %		1.5 – 2.0

LEED INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	0	
Manufacture Location		Weyauwega, WI
Extraction/Harvesting Location		Weyauwega, WI

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at [usa.sika.com](http://usa.sika.com) or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.