

Hydrotech® Hanover Fixed-Height Pedestal



BUILDING TRUST




formerly known as Hanover Fixed-Height Pedestal

GENERAL DESCRIPTION

The Hanover fixed-height pedestal system consists of octagonal fixed height support pedestals with integral joint spacer tabs composed of high density polyethylene that can be combined with octagonal leveling plates/shims made of flexible rubber.

BASIC USE

The Hanover fixed-height pedestal system is designed for use with Hydrotech's Architectural Pavers to provide a loose-laid, open joint paver installation. Combinations of leveling plates and pedestals can provide elevation of the pavers off the substrate from 1/16 inch, to provide free drainage and air movement beneath the paver surface or to make up for differences in height between the structural deck and the finished elevation.

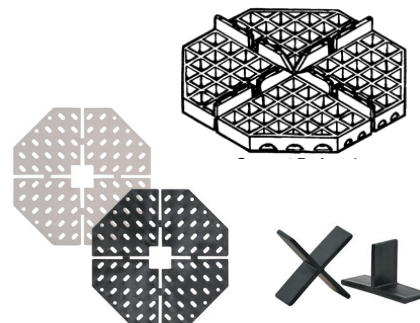

Leveling plates can be used singularly or stacked together to accommodate elevations from 1/16 inch to 5/8 inch (thickness of a support pedestal). Spacer tabs must be used to maintain consistent 1/8 inch joint spacing between pavers.

Support pedestals can be used singularly or stacked together to accommodate elevations from 5/8 inch to 3 inches. Leveling plates can be used with the support pedestals in whole, halves or quarters for minor leveling and elevation adjustments.

Both support pedestals and leveling plates are easily separated into halves or quarters to accommodate perimeter and corner conditions.

TECHNICAL DATA

Fixed-Height Pedestal	High Density Polyethylene	7 inches across flat dimen.; 5/8 inch thick; 1/8 inch joint spacer tabs
Leveling Plate	Flexible Rubber	7 inches across flat dimen.; 1/8 (white) and 1/16 (black) inch thick
Spacer Tabs	Rigid Plastic	1/8 inch thick

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	15 pi	
Manufacture Location		Hanover, PA
Extraction/Harvesting Location		Morristown, NJ

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.